


HPLC DATA SHEET

Febuxostat

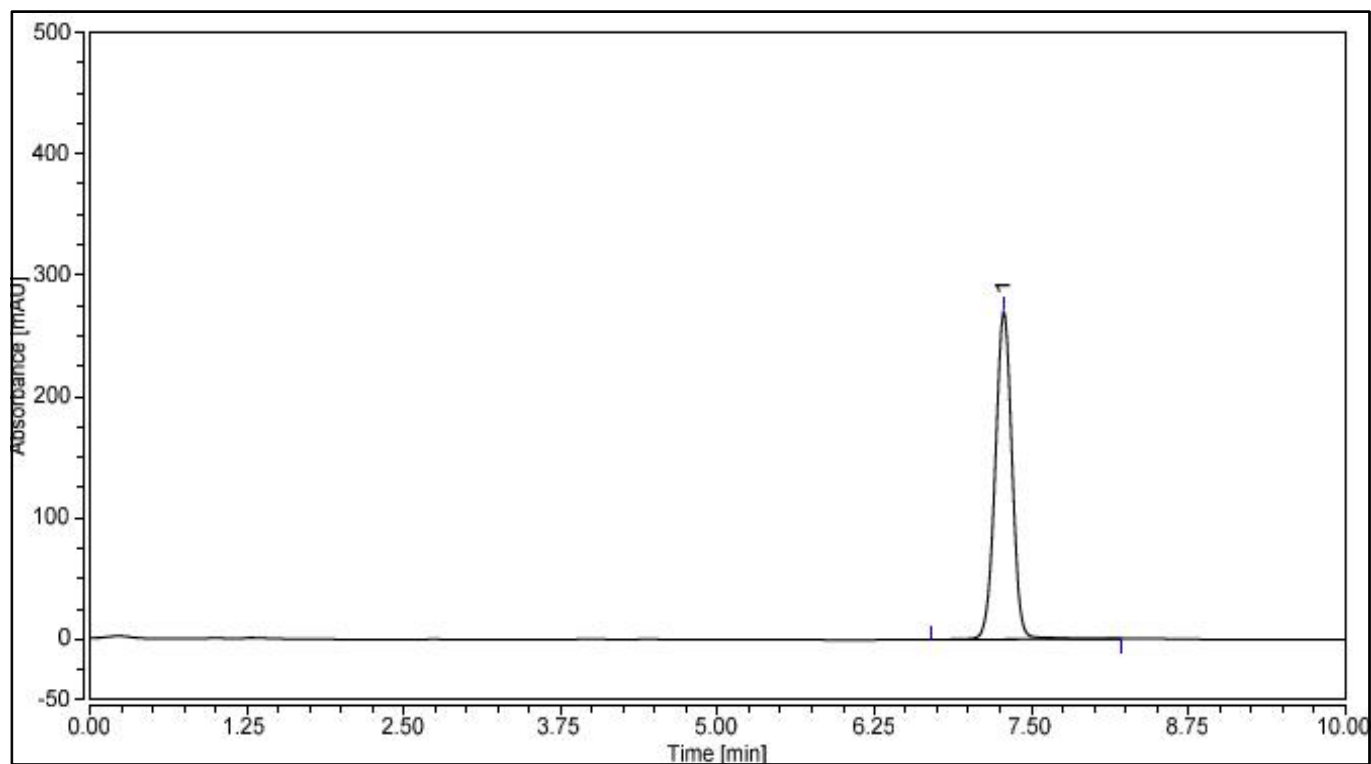

1. Febuxostat

HPLC condition

Column	INNO Column C18 (5 μ m, 4.6mm I.d. × 150mm)
Mobile Phase	60% ACN (0.05% TFA)
Flow rate	1.0 mL/min
Temperature	30°C
Detector	UV (315nm)